



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed

Dated 8 August 2003



Patents Form 1/77 THE PATENT OFFICE

Patents Act 1977  
(Rule 16)

23 DEC 2002

RECEIVED BY FAX

The  
Patent  
Office23 DEC 2002 E772758-1 002319  
PO 07700 00-0229754.7**Request for grant of a patent***(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

The Patent Office

Cardiff Road

Newport

Gwent NP9 1RH

1. Your reference

CM01121S/DJM/GBR/LCC/DIAMANTSTEIN

2. Patent application number

*(The Patent Office will fill in this part)*

0229754.7

23 DEC 2002

3. Full name, address and postcode of the or of each applicant *(underline all surnames)*MOTOROLA, INC  
1303 EAST ALGONQUIN ROAD,  
SCHAUMBURG, ILLINOIS 60196,  
U.S.A.Patents ADP number *(if you know it)*

08281107001 ✓

If the applicant is a corporate body, give the country/state of its incorporation

U.S.A.

DELAWARE

4. Title of the invention

SYSTEM, METHOD AND EQUIPMENT FOR READING INFORMATION ON A TARGET

5. Name of your agent *(if you have one)*

DEREK J MCCORMACK

*"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)*EUROPEAN INTELLECTUAL PROPERTY DEPARTMENT  
MIDPOINT  
ALENCON LINK  
BASINGSTOKE  
HAMPSHIRE RG21 7PL  
UK  
ADP NO. 00001180006 ✓Patents ADP number *(if you know it)*6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number

Country

Priority application number  
*(if you know it)*Date of filing  
*(day / month / year)*

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
*(day / month / year)*8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if:*☒ YES ☐ NO

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

0056273 23-Dec-02 02:32

**Patents Form 1/77**

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

## Continuation sheets of this form

Description 9  
 Claim(s) 4  
 Abstract 1  
 Drawing(s) 12

CF

10. If you are also filing any of the following, state how many against each item.

## Priority documents

## Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 3

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77) 1

Any other documents 1 x FEE SHEET  
 (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

J. McCormack

Date

23/12/02

12. Name and daytime telephone number of person to contact in the United Kingdom

DEREK J MCCORMACK

Louise CRISTOFOLI

01256 790589

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.  
 b) Write your answers in capital letters using black ink or you may type them.  
 c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.  
 d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.  
 e) Once you have filled in the form you must remember to sign and date it.  
 f) For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE  
CM01121S/DJM

1

TITLE: SYSTEM, METHOD AND EQUIPMENT FOR READING INFORMATION  
ON A TARGET

FIELD OF THE INVENTION

5

The present invention relates to a system, method and equipment for illuminating and reading information on a target. In particular, it relates to illuminating and reading information in a bar code on a target.

10

BACKGROUND OF THE INVENTION

Use of optically readable legends or labels such as bar codes on products to record and track the products is widely practised in industry and commerce. It is becoming common for bar code scanner devices which are used to read bar codes, such devices being herein referred to as 'imagers', to be worn on the hand of a user to provide a more ergonomically satisfactory and natural operation for the user. Also with the development of low power, short-range radio data transmission standards such as that known in the industry as Bluetooth™, it is not necessary to have a wired connection from the imager to the equipment processing and using the barcode or image data.

25

The use of CMOS imager chips in imagers is also becoming more popular because of their lower power consumption (as compared, for example to laser bar-code imagers), allowing a much smaller power source to be used. For example, the Motorola MCM20014 VGA resolution

30

ImageMOS™ sensor can capture an image in 1/30th second whilst consuming 70mA at 3.3V whereas a conventional laser

scan engine imager will take 1/20th second and require 150mA at 5V. An imager chip requires, however, an additional light source to illuminate the target area, e.g. the area on a product where a barcode is provided, if the ambient background light is not sufficient, whereas a laser scanner imager is its own light source. The additional light source is normally provided by a number of LEDs (Light Emitting Diodes or forward biased semiconductor p-n junction diodes) incorporated in a unit which also provides the reader function. The power consumption of the additional light source is considerable and causes the overall imager power consumption to be raised typically to 120mA at 5V. This is nearly the same as that for the laser scanner imager.

In some proposed scanning and LED illuminating imager devices, an attempt has been made to increase the amount of ambient light on the target by employing light collection and guidance, for example as described in US-A-6,042,012 but such optical collection systems add considerably to the size and weight of the imager and so are not suitable for use in wearable scanner applications.

Other proposed imagers use a targeting light spot or frame to ensure that the illuminating light source is aligned on the target before scanning so reducing the total illumination time and therefore the energy consumption, as for example described in US-A-6,340,114. However, again the necessary optical system unfortunately adds considerably to the size of the imager.

In summary, prior art imagers also incorporating an illuminating device are bulky and relatively heavy and are not particularly suitable for hand carried operation.

**SUMMARY OF THE PRESENT INVENTION**

According to the present invention in a first aspect there is provided a system for illuminating and reading  
5 information on a target including an illuminating device for illuminating the target, separate from the illuminating device a user wearable reader device for capturing an optical image of the target when illuminated by the illuminating device, detector means for detecting the  
10 location of the reader device and adjustment means for adjusting the illumination provided by the illumination device in response to a signal provided by the detector means so that a region on the target illuminated by the illuminating means is readable by the reader device.

15 The target may carry a bar code which is to be read by the reader device.

The reader device may comprise an optical bar code reader which converts the bar code into an electronic data signal. The system may also include a radio transmitter  
20 associated with the reader device which is operable to transmit the electronic data signal produced by the reader device to a remote radio receiver.

The reader device may be carried on the wrist, hand, finger or thumb of a user. For example, it may include a  
25 bracelet or strap to be attached to the user's wrist, or a partly or fully closed ring to be worn on a user's finger or thumb.

The illuminating device may comprise a unit which is wearable by the user on a different part of the user's  
30 body, e.g. on the user's chest or waist. The unit incorporating the illuminating device may incorporate a radio transceiver to receive radio signals from a

transmitter associated with the reader device and to forward radio signals to a remote receiver, e.g. associated with a control centre where information about products is recorded and processed.

5       The detector means may comprise a reflector on the reader means and means for irradiating a region including the reader means with a search beam of radiation to be reflected by the reflector when incident thereon. The search beam may comprise an infra-red beam. The detector  
10 means may also comprise a sensor to detect radiation reflected by the reflector. One or both of the means for irradiating and the sensor may conveniently be carried by a unit incorporating the illuminating means as referred to earlier.

15       Alternatively, the detector means may include means for determining the location of the reader device by radio signals sent between a transmitter carried on the reader and a separate receiver. The receiver may be carried on a unit comprising the illuminating device.

20       The illuminating means may comprise a light source, preferably comprising one or more solid state light cells, e.g. LEDs or electroluminescent cells. The light from the light source may be directed in the form of a beam by an adjustable (orientable) beam director, e.g. a movable  
25 mirror, lens, prism or the like. Where a mirror, the adjustable beam director may comprise a mirror which may be orientated electro-mechanically, e.g. by a MEMS (micro electro-mechanical system). Such mirrors are known per se.

30       Where the detector means comprises means for irradiating a region including the reader device with a search beam, the same beam director as used in the means for illuminating may be used to direct the search beam. The



search beam may be on whilst the illuminating beam is off and vice versa, although they may be on at the same time if they are in different frequency bands, e.g. the search beam in the infra-red and the illuminating beam in the visible  
5 region of the electromagnetic spectrum.

According to the present invention in a second aspect there is provided a method of illuminating and reading information on a target which includes illuminating the target by an illuminating device, capturing an optical  
10 image of the target when illuminated by the illuminating device by a reader device separate from the illuminating device, detecting by detector means the location of the reader device, and adjusting the illumination provided by the illumination device in response to a signal provided by  
15 the detector means so that a region on the target illuminated by the illuminating means is readable by the reader device.

By the invention, the functions of the illuminating means and the reader device are separated. In contrast to  
20 the prior art, the user does not have to adjust the illuminating device to ensure that the region of the target which is illuminated is within the field of view of the reader device. This adjustment is beneficially undertaken automatically by signals from the detection means  
25 controlling and adjustment of the illuminating means. Consequently, the reader device can be suitably small and lightweight and therefore ergonomically more satisfactory than low power prior art bar code readers for use in a single unit in association with an illuminating means.

30 According to the present invention in a third aspect there is provided a unit for illuminating information on a target to be read by a reader device by the method of the

second aspect, including an illumination device for illuminating the target, detector means for detecting the location of the reader device and adjustment means for adjusting the illumination provided by the illumination device in response to a signal provided by the detector means so that a region on the target illuminated by the illuminating means is readable by the reader device.

Embodiments of the present invention will now be described by way of example with reference to the accompanying drawings, in which:

#### BRIEF DESCRIPTION OF THE ACCOMPANYING DRAWINGS

FIG. 1 is a schematic diagram showing a target bar code illuminating and reading system embodying the invention.

FIG. 2 is a schematic diagram of a target illuminating unit for use in the system shown in FIG. 1.

FIG. 3 is a diagram illustrating a system and procedure for imager location for use in the system shown in FIG. 1.

#### DESCRIPTION OF EMBODIMENTS OF THE INVENTION

As shown in FIG. 1, a system for illuminating and reading information on a target is shown. The target, indicated by reference numeral 12 may for example be a bar code label on a product to be identified and recorded for inventory purposes. The product carrying the bar code label may be one of a wide range of product forms. One such form is shown in FIG. 1. It may also be a package, e.g. for transport by a package delivery service. The target 12 is illuminated by a beam 15 produced by a target illumination

unit 14. An imager 11 points at the target 12 and captures an image of the target 12 in its field of view 13. The imager 11 has a ring 18 attached thereto which is worn by a user on a finger of the user. The imager 11 produces an electronic signal corresponding to the detected optical image and information carried on the target 12. The imager 11 also includes a Bluetooth radio transmitter. The electronic signal is transmitted thereby by a radio communication 16 to a radio transceiver unit 17 carried on the body of the user, indicated by reference numeral 19. The transceiver unit 17 sends and receives information by radio signals to and from a remote central control (not shown) in which information relating to identified products (e.g. as denoted by target 12 and other targets) is stored and processed. Although the unit 14 and the unit 17 are shown as separate units, they may in practice be combined in a single unit.

FIG. 2 shows one form of the unit 14 for producing and positioning the beam 15 for use in the system shown in FIG. 1. A light source 21 produces a beam of light 24 which is incident onto a concave mirror 22 which is part of a MEMS (Micro Electrical Mechanical System) which is capable of electro-mechanically steering the beam 15 which is produced as a reflected beam by the mirror 22 from the beam 24. The MEMS includes a processor 37 for controlling operations of the MEMS.

FIG. 3 shows one form of imager location system for use in the illumination and reader system shown in FIG. 1. The unit 14 shown in FIG. 2 is again used. A focused and modulated beam of infra-red radiation is produced by a source 30 and is directed at the mirror 22. The beam is reflected by the mirror 22 to produce an infra-red beam 31.

The beam 31 is scanned over a search area 32 by the mirror 22 until it is reflected back by a small target reflector 33 carried on the imager 11. A reflected beam 34 is thereby produced which is detected by a sensor 35 carried by the unit 14. The orientation of the beam 31 at the instant the reflected beam 34 is detected by the sensor 35 is recorded by the processor 37 included in the unit 14. This orientation captures the instant position of the reflector 33 and imager 11 within the area scanned by the infra-red beam 31. A suitable incremental change in orientation of a required principal direction or axis 36 of the beam 15 is made by adjustment of the orientation of the mirror 22 under control of the processor 37 causing the beam 15 to illuminate the target 12 (FIG. 1) in an area within the field of view 13 of the imager 11.

The beam 31 is modulated to avoid the detection system comprising the sensor 35 being saturated or confused by infra-red energy from external sources such as the sun or room lighting. For example, the beam 31 may be modulated with a sine wave at a fixed frequency. A narrow band filter at this frequency may be applied by the sensor 35.

In an alternative form of the location system instead of that shown in FIG. 3, a wireless signal may be sent from the imager 11 serving as a first radio terminal to a first receiver unit within the unit 14 and also to a second receiver unit. The relative position of the imager 11 may thereby be determined in a known manner, e.g. by taking time difference of arrival and received signal strength measurements from a signal sent from the imager 11 to the two receiver units. In this procedure, the equipment has to be calibrated when first worn by the user since the relative positions of the two receiver units will vary from

user to user. This may be carried out by the user manually aligning the beam 15 to provide a reference point which is recorded by a processor within the unit 14. Desirably, the imager 11 and the first and second receiver units are  
5 separated by distances which are as great as possible.

For example, if Bluetooth™ short range radio communication is used in the alternative form of location system, a signal frame in the 2.4GHz band containing timing information is established. At the speed of radio-waves,  
10 300 million metres/sec, the time difference between the same signal received at two locations which are 1 metre apart, will be 0.33 microsecs - an easily detected and measurable difference. Since the two signals received have the same clock, we can synchronize to that clock and then  
15 measure phase differences between the two signals to obtain a very precise estimate of time of difference of arrival between the signals. This in turn can be translated into a distance measurement and then standard triangulation methods can be used to calculate the position of the imager  
20 11 (transmitting unit) relative to the receiving units.

## CLAIMS

1. A system for illuminating and reading information on a target including an illuminating device for illuminating  
5 the target, separate from the illuminating device a user wearable reader device for capturing an optical image of the target when illuminated by the illuminating device, detector means for detecting the location of the reader device and adjustment means for adjusting the illumination  
10 provided by the illumination device in response to a signal provided by the detector means so that a region on the target illuminated by the illuminating means is readable by the reader device.
2. A system according to claim 1 wherein the reader  
15 device is operable to read a bar code on the target.
3. A system according to claim 2 and wherein the reader device is operable to convert the read bar code into an electronic data signal.
4. A system according to claim 3 and wherein the system  
20 also includes a radio transmitter associated with the reader device which is operable to transmit the electronic data signal produced by the reader device to a remote radio receiver.
5. A system according to any one of the preceding claims  
25 and wherein the reader device is adapted to be carried on the wrist, hand, finger or thumb of a user.
6. A system according to claim 5 and wherein the reader device includes a bracelet or strap to be attached to a user's wrist, or a partly or fully closed ring to be worn  
30 on a user's finger or thumb.

7. A system according to claim 5 or claim 6 and wherein the illuminating device is included in a unit which is wearable by the user on another part of the user's body.
8. A system according to claim 7 and wherein the unit is  
5 wearable on a user's chest or waist.
9. A system according to any one of the preceding claims and wherein the illuminating means is incorporated in a unit which also incorporates a radio transceiver operable to receive radio signals from a transmitter associated with  
10 the reader device and to forward radio signals to a remote receiver.
10. A system according to any one of the preceding claims and wherein the detector means includes a reflector on the reader means and means for irradiating a region including  
15 the reader means with a search beam of radiation to be reflected by the reflector when incident thereon.
11. A system according to claim 10 and wherein the search beam comprises an infra-red beam.
12. A system according to claim 10 or claim 11 and wherein  
20 the detector means also comprises a sensor operable to detect radiation reflected by the reflector and to record the position of the search beam when reflected by the reflector.
13. A system according to claim 12 and wherein one or both  
25 of the means for irradiating and the sensor are carried by a unit incorporating the illuminating means.
14. A system according to any one of claims 1 to 9 and wherein the detector means includes means for determining the location of the reader device by radio signals sent  
30 between a transmitter carried on the reader device and a separate receiver.

15. A system according to claim 14 and wherein the separate receiver is carried on a unit incorporating the illuminating device.
16. A system according to any one of the preceding claims  
5 and wherein the illuminating means comprises a light source comprising at least one solid state light cell.
17. A system according to claim 16 and wherein the at least one light cell comprises a light emitting diode or an electroluminescent cell.
- 10 18. A system according to any one of the preceding claims and wherein the illuminating means includes a light source and is operable such that light from the light source is directed in the form of a beam by a beam director whose orientation may be adjusted.
- 15 19. A system according to claim 18 and wherein the beam director comprises a movable mirror, lens, or prism.
20. A system according to claim 19 and wherein the beam director comprises a mirror which may be orientated electro-mechanically.
- 20 21. A system according to claim 18, claim 19 or claim 20 and wherein the detector means includes means for irradiating a region including the reader device with a search beam, and the beam director included in the means for illuminating is also operable to direct the search  
25 beam.
22. A method of illuminating and reading information on a target which includes illuminating the target by an illuminating device, capturing an optical image of the target when illuminated by the illuminating device by a  
30 reader device separate from the illuminating device, detecting by detector means the location of the reader device, and adjusting the illumination provided by the



illumination device in response to a signal provided by the detector means so that a region on the target illuminated by the illuminating means is readable by the reader device.

23. A unit for illumination information on a target to be

5 read by a reader device by the method claimed in claim 22, including an illuminating device for illuminating the target, detector means for detecting the location of the reader device and adjustment means for adjusting the illumination provided by the illumination device in

10 response to a signal provided by the detector means so that a region on the target illuminated by the illuminating means is readable by the reader device.

## ABSTRACT

~~SYSTEM, METHOD AND EQUIPMENT FOR READING INFORMATION ON A TARGET~~

5

A system for illuminating and reading information on a target <sup>(eg Barcode)</sup> including an illuminating device for illuminating the target, separate from the illuminating device a user wearable reader device for capturing an optical image of

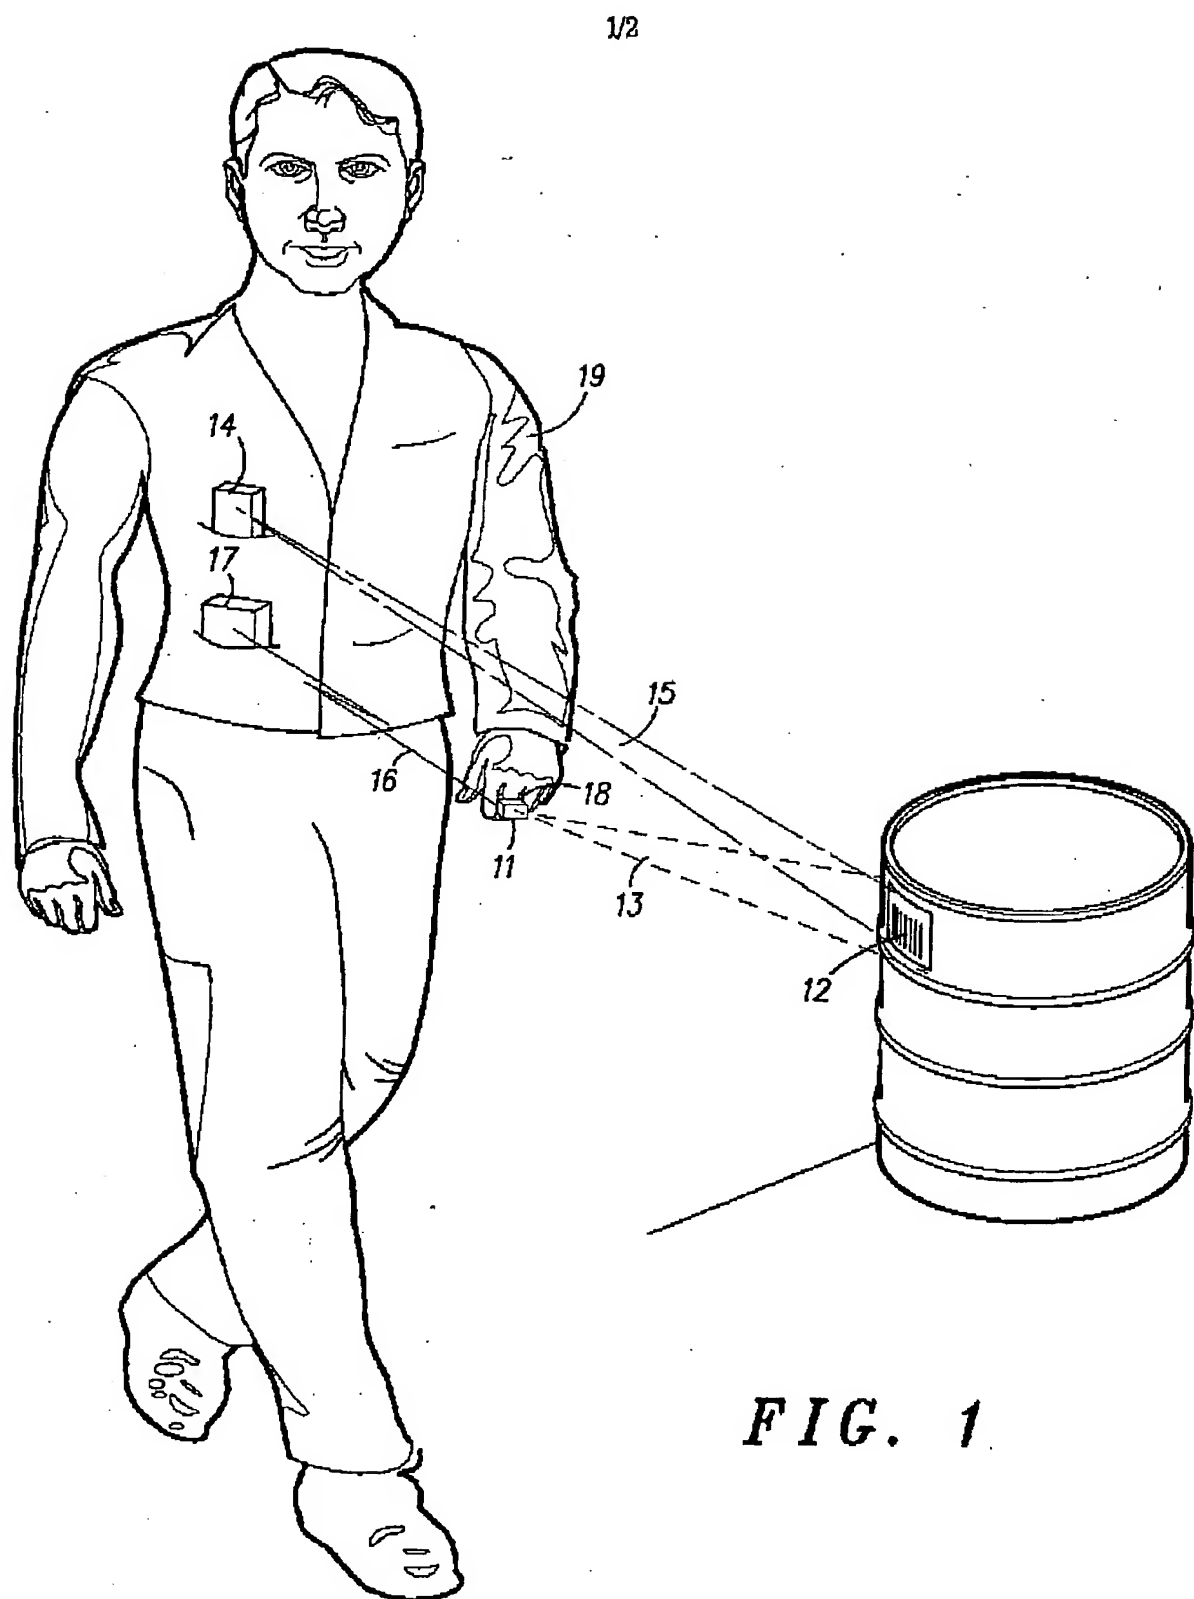
10

the target when illuminated by the illuminating device, detector means for detecting the location of the reader device and adjustment means for adjusting the illumination provided by the illumination device in response to a signal provided by the detector means so that a region on the

15

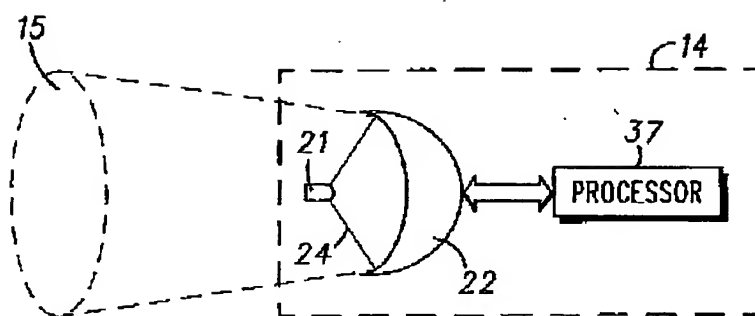
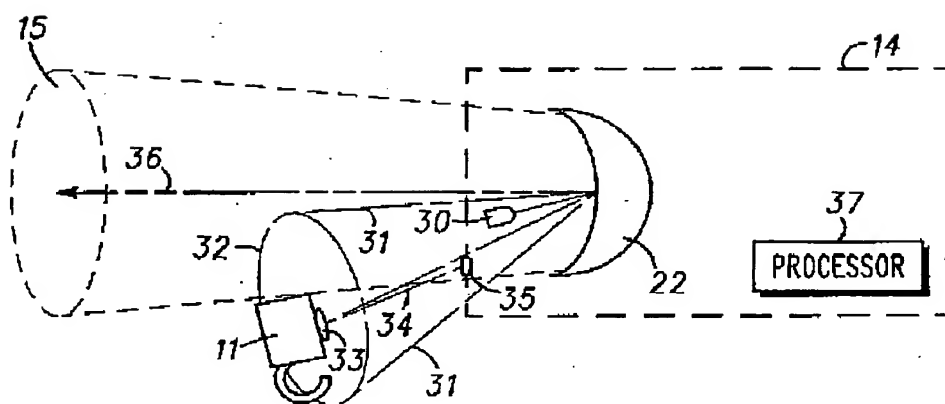
target illuminated by the illuminating means is readable by the reader device. A method of use of the system and an illumination unit for use in the system are also described.

[Fig 1]

**FIG. 1**



2/2

**FIG. 2****FIG. 3**

